

TYR

Armaturl:

Fremstillet i aluminium.
Stor køleflade.

Montering:

Passer på Ø60mm maste/rør.

Omgivelsestemperatur: ±25° til +50° C.

Tilslutning:

Leveres med 8 meter kabel.

Garanti:

5 års garanti, jvf. gældende salgs- og leveringsbetingelser Aaxsus LED.



PRODUKTINFORMATION:

Armaturl:	20W	30W	40W	70W	100W
Farve temperatur:	4500K				
Varenr.:	4-260-0	4-621-0	4-622-0	4-625-0	4-627-0
Art. nr.:	1809	1810	1811	1816	1814
Lumen:	1800lm	2700lm	3600lm	6300lm	9000lm
Spændingsområde:	220 - 240V AC				
Frekvens:	50 Hz				
CRI/RA værdi:	> 75				
IP Klasse:	IP67				
Dæmpbar:	Ved bestilling				
Chip:	Bridgelux				
Driver:	Mean Well				
Tilsvarende i natrium:	40W	50-60W	70-80W	125-140W	200-250W
Vægt:	7,3 kg.				
Armaturl farve:	Sølv og antrasit				
Monteringshøjde:	3-4 m	4-5 m	5-6 m	6-10 m	6-10 m
Spredningsvinkel:	120°				
Drifteffekt:	24W	33W	43W	76W	108W
Mål: (LxBxH)	830x360x163mm				

Tyr kan også leveres med effekterne 50W, 60W og 80W (bestillingsvarer)


TEKNISKE TEGNINGER

TYR

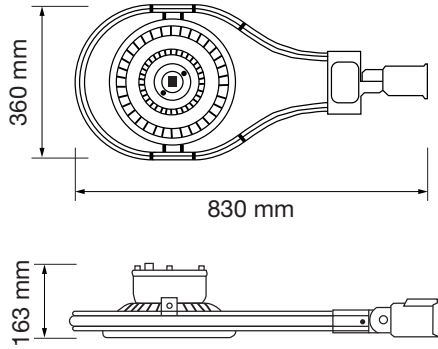


LYSKURVER


20W

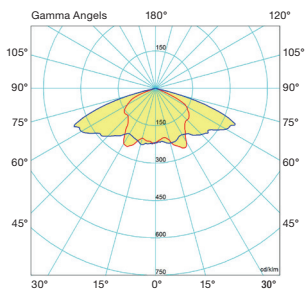


30W

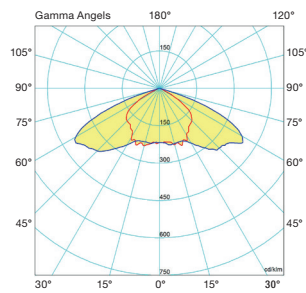

40W

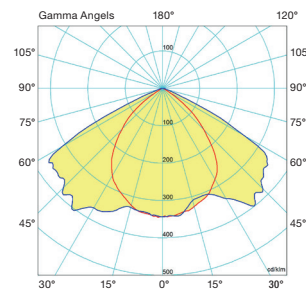

70W

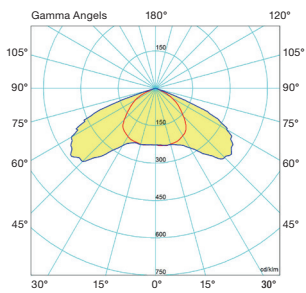

100W

